




Altro Pisces™




Lighthouse | SB2001
WR291 / A1M01 / LRV 70



Cuttlefish | SB2002
WR385 / A1M385 / LRV 50



Shoreline | SB2006
WR389 / A1M389 / LRV 38



Sand Dune | SB2018
WR568 / A1M239 / LRV 20



Breakwater | SB2003
WR386 / A1M20 / LRV 42



Fisherman | SB2009
WR392 / A1M392 / LRV 48



Driftwood | SB2004
WR387 / A1M387 / LRV 32



Anchor | SB2008
WR391 / A1M82 / LRV 16



Jellyfish | SB2005
WR388 / A1M388 / LRV 46



Deckchair | SB2013
WR396 / A1M396 / LRV 50



Sea Urchin | SB2014
WR397 / A1M397 / LRV 34



Houseboat | SB2015
WR398 / A1M398 / LRV 25




Porthole | SB2007
WR390 / A1M390 / LRV 30



Windbreak | SB2016
WR399 / A1M399 / LRV 38



Beach Hut | SB2012
WR395 / A1M395 / LRV 37

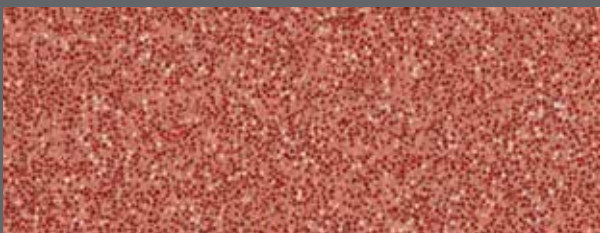

Starfish | SB2010
WR393 / A1M393 / LRV 21






















Seahorse | SB2011
WR394 / A1M394 / LRV 47



Typical applications

Bathrooms. Showers. Changing rooms (except where spikes / studs – then see 2.5mm+ options). Saunas. Spas. Wet rooms. Home adaptation level access bathrooms. Therapy pools with specialist care.

Technical information

	Fire behaviour tested in acc. with	EN ISO 9239-1 EN ISO 11925-2 EN 13501-1	≥ 8 kW/m ² Pass B _{fl} -s1
	Slip resistance	EN 13893 PTV EN 16165 Annex B / ASR A1.5 EN 13845 Annex C EN 16165 Annex A	≥ 0.30 / DS ≥ 50 (slider 96) R11 ESf / ESb B
	Sound insulation	EN ISO 140-8	ca. 5 dB
	Flooring type	EN 13845	Safety flooring
	Thickness	EN ISO 24346	2 mm
	Wear layer thickness	EN ISO 24340	2 mm
	Roll dimensions	EN ISO 24341	2 m x 20 m = 40 m ²
	Weight	EN ISO 23997	2.6 kg/m ²
	Residual indentation	EN ISO 24343-1	≤ 0.10 mm
	Classification for use	EN ISO 10874	34, 43
	Flexibility	EN ISO 24344	Pass
	Dimensional stability	EN ISO 23999	≤ 0.4 %
	Light fastness	EN ISO 105-B02	≥ 6
	Castor chair abrasion	ISO 4918	Yes, type W
	Wear resistance	EN 13845 Annex D	≤ 10% / 50000 cycles
	Chemical resistance	EN ISO 26987	Good
	Underfloor heating	EN 12524	Suitable
	Electrical behaviours	EN 1815	≤ 2 kV, antistatic
	VOC emissions	CDPH 1350 / Floorscore	Approved



Altro Limited a company certified by SGS to ISO 9001 and ISO 14001.



*Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).



Sustainability



1A+ BRE generic green guide rating for resilient flooring, full details available at www.thegreenguide.org.uk



Installation and maintenance

Please refer to Altro installation and maintenance instructions. Failure to follow these instructions can affect product performance and may affect or invalidate Altro's product guarantee. Technical information on installation and maintenance (including cleaning and staining) can be found at www.altro.com

Light Reflectance Values measured in accordance with BS 8493:2008. Exact material match with samples cannot be guaranteed. Codes: WR = weld rod, A1M = mastic, LRV = light reflectance value